


Electrocorder Model: EC-7VAR Dual Range



**Three voltage channels
600Vac**


**Three current channels
c/w selectable range;
400Aac or 3kAac**

**One Power Factor (Cos
 Φ) channel; phase angle
between L1 and A1**

**Rogowski coils fit round
140mm cables**

**Complete with Electrosoft
energy analysis software**

**Sealed to IP43 as
standard, available as
IP65/NEMA 12/4**



Records voltage up to 600Vac and loads up to 3kAac per phase

Data stored in non-volatile memory

Memory capacity of 32,000 (True RMS) values per channel (10bit), up to 300 days continuous recording

Selectable averaging period from 2 seconds to 60 minutes

Accuracy:-

Voltage $\pm 1\%$ of reading

Current typically to $\pm 3\%$ of reading

Kit includes data logger, Rogowski transducers, voltage leads, USB lead, Electrosoft software and carry case

The advantage of the Electrocorder products over most others is that our Data Loggers constantly sample information (recording the Minimum, Maximum and Average reading) over the set period, many other products only take 'snap shots' of what is going on and can miss 99.9% of the data that is critical to your analysis.

acksen > Electrorecorder Model: EC-7VAR

The Electrorecorder range is designed to allow electrical engineers cost effectively monitor single and three phase loads. This product will allow voltage, load and reactive power problems to be highlighted quickly for further investigation.

Setting up the Electrorecorder EC-7VAR is easy, suitable for non-technical staff. Using the supplied (free) Windows software, Electrosoft; input the location details for the logging and choose the logging period. Electrosoft will print the necessary dispatch/return documentation including user instructions. All data is included in a database of dispatches and returns, allowing you to track the location of multiple loggers.

Why is the Electrorecorder better than other similarly priced competitors? The Electrorecorder range use a constant sampling technique, unlike the single reading of competitors. When the loggers start to record, they sample every channel 16 times per cycle, a cycle is 16ms at 60Hz and 20ms at 50Hz. At the end of each averaging period, 3 quantities are saved for each channel, the True RMS average, the Max, which is the highest cycle value during the period and the Min, lowest cycle value. This means that it will record all the peaks and troughs which are one cycle or longer.

The voltage and current levels are stored with dates and times. With the back-up battery, the Electrorecorder can continue to record for months.

The recorded data is uploaded to a PC via the supplied USB lead. Using Electrosoft, the recorded current levels, with dates and times that can be viewed in both tabular and graphical form, exported to a spreadsheet or saved to file. Graphs can be printed showing the recorded levels and the allowable tolerance bands. These results may then be discussed with the customer.

On the logger, recording is signified by a flashing green light. A red light advises users that the unit has completed recording.

The EC-7VAR is specifically designed to monitor one, two or three current channels, as well as one, two or three voltage channels plus Power Factor. Power Factor recorded is the phase angle between L1 and A1.

The EC-7VAR-RS has two user selectable current ranges of 4Aac to 400Aac and of 20Aac to 3kAac.


Technical specifications (subject to change without notice)

Recorded values	V_{avg} , V_{max} and V_{min} on 3 channels and I_{avg} , I_{max} & I_{min} on 3 channels
Voltage measurement range (Vrms)	5Vac to 600Vrms (Ph – Ph) or 5V to 350Vrms (Ph – N)
Measurement accuracy	±1% of reading, ±1 Volt. (10 bit) within 100Vac-450Vrms (ph-ph); else ±3%. (50/60Hz ±2%)
Maximum channel input voltage	600Vrms (Ph – Ph), 350Vrms (Ph – N)
Inputs (non-isolated inputs)	Three phase inputs (L1, L2 & L3) & Neutral (N), non-isolated input channels
Input socket types	4mm shrouded 'banana' plugs & sockets, each with insulated crocodile clip
V_{max} , V_{min} , I_{max} & I_{min} time resolution	Always one cycle (50/60 Hz), independent of selected averaging period
Current measurement range (Irms)	RS model is 4Aac – 400Aac and 20Aac – 3kAac
Current measurement accuracy	Typically ±5% of reading (within 10%-90% of range), otherwise 5% of range
Current Input socket types	4mm shrouded 'banana' plugs & sockets, each with insulated crocodile clip
Sampling frequency (all channels)	16 samples per cycle 800Hz @ 50Hz or 960Hz @ 60Hz
Data recorded	Average, max & min voltage & current values and Power Factor during the averaging period
Power Factor range and accuracy (measured on L1 and A1)	Accurate to ~3% between lead 0.5 and 0.5 lag; ~6% between 0.5 and 0.3 lead or lag
Memory capacity & type	384kB able to record 32,000 values per channel/phase . Non-volatile SEEPROM
Memory - averaging period & duration	2 sec to 60 min (2 sec gives 4 hrs logging, 60 min gives up to 300 days logging)
Real-time clock accuracy	Greater than 0.001%
Supplied current sensor	CAT III 1kV or CAT IV 600V, with 140mm aperture
Current sensor dimensions	Lead length 2m/6'6" , sensor length 450mm/18" (Open), sensor diameter 140mm/6" (Closed)
Input voltage lead length	Metric 2 metres Imperial/English 6' 6" (6 feet, 6 inches)
Battery life while logging	Unlimited when connected to voltage
Battery type	Loggers contains six 1.5V Alkaline 'AA' batteries (IEC-LR6, ANSI/NEDA-15A)
Communications interface type	USB, optically isolated to 5,2kV
Environmental (temp & sealing)	-10C to +40C or +14°F to +104°F. Sealed to IP43 (Optional IP65, NEMA 12/4)
Dimensions & weight	Metric 260 x 180 x 190mm & 2kg Imperial/English - 10" x 7" x 8" & 4lb
Standards	Recording - EN50160: 1994 - 1000 CAT III, 600V CAT IV

Determining product order codes:

To specify your Electrorecorder select various codes and enter into the boxes in order to create a correct product code.

For example: EC-7VAR-RS-5H-IEC-IP43-KIT.

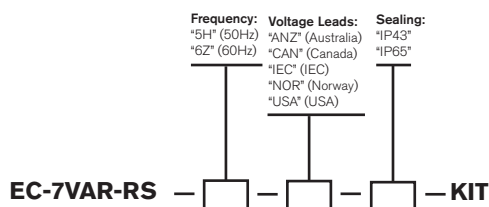

Warranty & calibration

Acksen Ltd products carry a *Lifetime back to base warranty covering manufacturing defects and component failures. Each unit is individually calibrated during testing.

*Refer to website for full terms and conditions.

Conformity

Emissions EN55022:1994B, (EN50081-1:1992).
Immunity EN50082-2:1995, following the provisions of EMC directive 89/336/EEC. Recording std EN50160:1994.
LVD 72/23/EEC with respect to EN60065. (IEC-61010).
All models certified (light industrial, 3V/m).